



TOA

ROADLINE PAINT

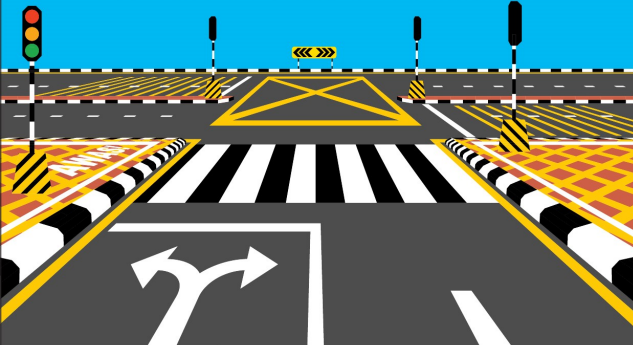


Reflective & Non-Reflective


- **Excellent durability**
Daya tahan lasak terbaik
- **High abrasion resistance**
Daya tahan abrasi yang tinggi
- **Resistance to bleed through bitumen**
Daya tahan saliran terhadap bitumen
- **Fast drying & Non-slippery**
Cepat kering dan tidak licin



Size: 5L



SIRIM
Certified to MS 164 : 2007
Certification No. : FT032732



NO HANDICAP
NO ADDED MERCURY

TOA

ROADLINE PAINT

TOA Roadline Paint is available both, reflective (R) and non-reflective (NR) type
TOA Roadline Paint boleh didapatkan dalam jenis reflektif (R) dan tidak reflektif (NR)

Yellow	Black	White
NR : 4146 R : 4246	NR : 4144 R : Unavailable	NR : 4145 R : 4245

TOA Roadline Paint is a solvent-based high performance modified alkyd road marking paint. It comes with excellent durability and high abrasion resistance. It is used as a self-priming paint and finishing coat.

It is suitable to apply on concrete, bitumen, or asphalt surface, both exterior and interior uses.

The example of usages.

- Road traffic
- Car park marking
- Directional arrow marking
- Center, Edge, Cross lines
- Divided line marking
- Lot numbering

Application Details
Touch Dry : 3-4 hours
Recoat : 10-15 hours as a minimum
Film Property: Matt finishing
No. of Coat : 2 coats
Application : Brush, roller, air spray, or airless spray
Theoretical : 8-9 m² / liter / coat
Coverage
Thinning : For normal use, thinning is not necessary. Use thinner for dilution if necessary.

TOA Roadline Paint adalah cat penanda jalan berasaskan larutan alkyd yang diubah suai berprestasi tinggi. Diengkapi dengan ketahanan yang sangat baik dan rintangan abrasi yang tinggi, ia digunakan sebagai cat primer dengan sendirinya dan kot-kot keselamatan.

Ia adalah sesuai untuk digunakan pada permukaan jalan konkrit, bitumen, atau asfalt, bagi kegunaan luar dan dalam.

Contoh kegunaan.

- Garis lalu lintas
- Penanda tempat letak kereta
- Penanda anak panah arah
- Garisan Tengah, Tepi, Silang
- Garisan pembahagi jalan
- Penomboran lot

Application Details
Kering Sentuh : 3 - 4 Jam
Utang Cat : 10 - 15 jam minimum
Ciri lapisan : Kerasan matt
No. of Coat : 2 lapisan
Application : Berus, alat penggelek, alat penyembur cat
Cara mengguna : 8-9 m² / liter / lapisan
Coverage
Pencarian : Untuk kegunaan biasa pencarian tidak diperlukan. Guna pada kuantiti minima jika perlu

TOA PAINT PRODUCTS SDN. BHD. (647481-P)
Lot 638/2, Jalan Telekong, Telok Gong, 42000 Pan Kiang, Selangor, Malaysia
Tel : +603 3134 1626, +603 3134 1639 Fax : +603 3134 1581

Email : toa@toagroup.com.my
Website : www.toagroup.com.my

